

TEXWRAP®

1606

MADE IN U.S.A.

BOTTOM LAP SEALER

Features, Functions & Benefits

- Multiple seal options: static, drag wire, band seal
- Various former styles available
- 44" flat film, PVC, Poly, Polyolefin
- Dual roll film holder
- Touchscreen controlled heaters with auto tune
- Handwheel adjustments for the seal jaw opening and seal line height
- Infeed and exit conveyor speed trim to control product spacing
- MOTION TRIM™ for increased speeds
- Allen Bradley PLC control
- Swivel touchscreen operator interface with step-by-step product set-up help screens to explain each function.
- Alphanumeric "save as" for custom product codes.
- Diagnostic features on the touchscreen
- Pin perforator air evacuation
- Variable speed control with maximum belt speed of 120 feet per minute
- Set-up scales on all mechanical adjustments
- Dual speed modulation control automatically adjusts machine speed to match production flow (optional photo eye required)
- Test mode to simulate product run for estimating purposes
- Durable powder coat finish
- Hot knife cross seal
- Powered film unwind
- Ambidextrous design



*Conveyor sold separately




AVERO

PACKAGING CORPORATION

Flexible Packaging – Machinery & Materials

888 East Belvidere Rd., Unit 206, Grayslake, IL 60030
Phone: (847) 231-6100 Fax: (847) 231-6101



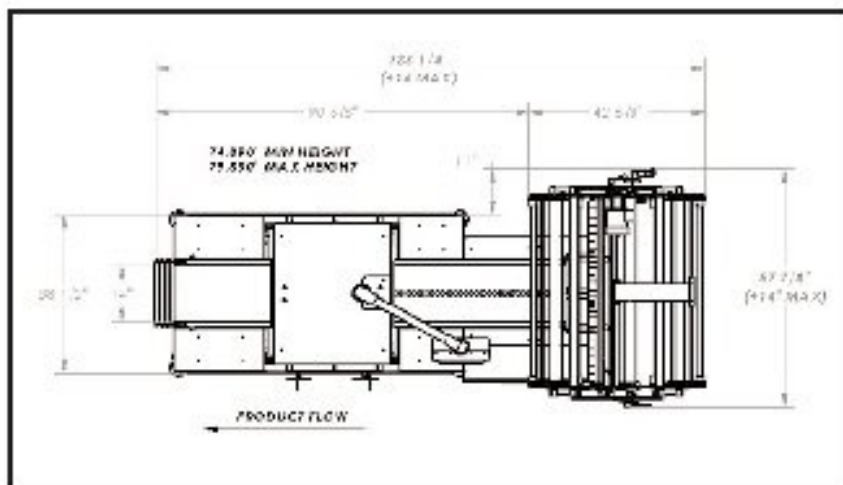

SPECIFICATIONS	1606
SEAL SIZE	Infinite L x 16"W
MAXIMUM PKG SIZE	Infinite L x 15"W x 5.5"H
MINIMUM PKG SIZE	4"L x 3"W
MAXIMUM FILM SPEED	120 FPM
FILM WIDTH	44" flat film
ELECTRICAL	240/208V, 16/19 amp, 1 phase
AIR REQUIREMENTS	80 PSI, 12 CFM
CONVEYOR HEIGHT	Adj. 34" to 38"H

ADD OTHER TEXWRAP EQUIPMENT FOR A COMPLETE SYSTEM:

INFEEDS:	Belted Conveyor	Flighted Conveyor	Flightbar Conveyor
Texwrap produces a full range of infeed conveyors from simple belt, lug, and flight bar to Servo placement systems that will enhance the operation of the wrapper.			
TUNNELS:	Single Tunnel	Double Tunnel	Tunnel Window
Cool-Touch insulated Texwrap Tunnels offer the proper balance between cost, versatility and durability. These tunnels are designed for multiple shifts 24/7 operation. Optional lighted window on all models.			
OTHER INFEED SYSTEMS	The Texwrap 1606 easily integrates with third party systems.		

V1.1



*Specifications on all machines subject to change without notice. Some information may have been updated since the time of publication.

800-946-2837