

TEXWRAP[®] 2814SS

MADE IN U.S.A. **SERVOMAX**

SERVO SIDE SEALER

Features, Functions & Benefits


- Large Product size capacity
- 14" opening, 28" belt width
- 34" length cross seal bar
- 72" SW or 36" CF film capacity
- Dual Axis Servo Drives on Cross Seal
- Inverter duty AC motors
- Auto leveling cross seal height
- Hinge-up safety doors for easy access
- 140 fpm belt speeds
- Independent conveyors allow relaxed film at cross seal
- Centerline design with "Film Saver" infeed standard
- Easy change over "No Tools" hand wheel with touchscreen confirmation
- Swivel Mounted Touchscreen with set-up product memory & machine diagnostics
- Upstream/Downstream hand shaking, feeder controls, quick connect cable system for additional equipment
- Welded Tubular construction with powder coat finish
- Stainless steel inverting head with air bearing surface
- Internal scrap take up with advanced oscillating guide, film break & take up reel alarms
- "DRS" low maintenance side seal
- Allen Bradley Control Logix Platform
- Very rugged mechanical design for years of 24/7 service



Flexible Packaging – Machinery & Materials

800-946-2837



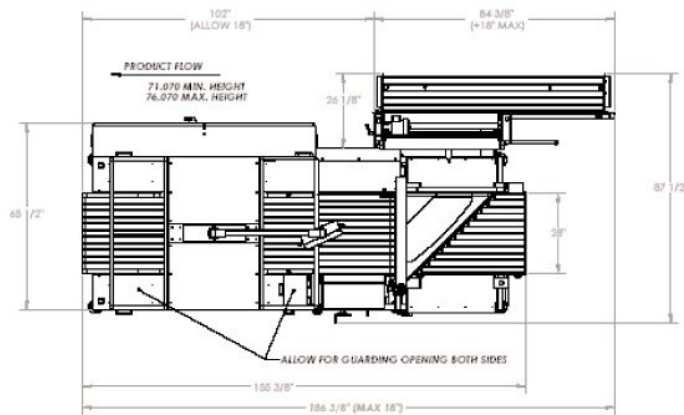

| SPECIFICATIONS | 2814SS |
|--------------------|--|
| CONVEYOR WIDTH | 28"W |
| CROSS SEAL WIDTH | 34" Endseal width |
| CROSS SEAL DRIVE | Dual Axis Servo |
| MINIMUM PKG SIZE | 4"L x 2"W |
| FILM WIDTH | Max 72" flat film, 36"CF |
| ELECTRICAL | consult factory |
| AIR REQUIREMENTS | 80 PSI, 1 CFM |
| CONVEYOR HEIGHT | Adj. From 32.5" to 37.5"H |
| MAXIMUM FILM SPEED | 140 FPM |
| MACHINE CONTROLS | Allen Bradley Control Logix |
| CONTROL PANEL | Easy Access Swivel Mounted with CTC touch screen |

STANDARD FEATURES:

Dual Round Seal System

Patent pending low maintenance side seal offers true 24/7 production.

Film Saver Infeed

Centerline design with multi-belt film saver infeed places product directly on the film.

Internal Scrap Take-Up

Minimize scrap changes with the oscillating film scrap take-up. Scrap system monitor detects broken scrap and scrap bail full.

ADD OTHER TEXWRAP EQUIPMENT FOR A COMPLETE SYSTEM:

| INFEEDS: | Belted Conveyor | Flighted Conveyor | Flightbar Conveyor |
|---|-----------------|-------------------|--------------------|
| Texwrap produces a full range of infeed conveyors from simple belt, lug, and flight bar to Servo placement systems that will enhance the operation of the wrapper. | | | |
| TUNNELS: | Single Tunnel | Double Tunnel | Tunnel Window |
| Cool-Touch insulated Texwrap Tunnels offer the proper balance between cost, versatility and durability. These tunnels are designed for multiple shifts 24/7 operation. Optional lighted window on all models. | | | |

V1.1